

Rubber Magnet : Examples of Magnets Produced According to Use

1. Micromotor



※There are limits according to the balance between length, width and thickness dimensions.



◎Workable dimensions: length 40 - 300 mm / width 2 - 30 mm / thickness 0.8 - 6.7 mm

※There are limits according to the balance between length, width and thickness dimensions.

◎Magnetization specification: Non-magnetized

2. Sensor

Rectangular cuboid-shaped product

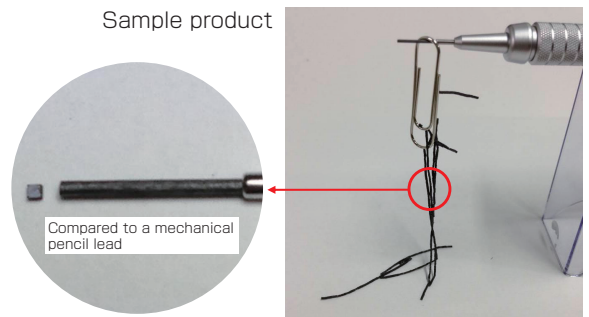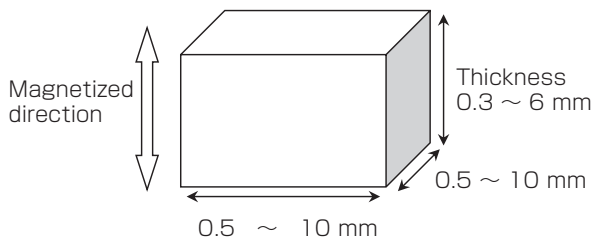

0.5mm square x 0.3mm thickness. 1P magnetized. N pole with white marking



◎Workable dimensions: length 0.5 - 10 mm / width 0.5 - 10 mm / thickness 0.3 - 6 mm

※There are limits according to the balance between each dimension.

◎Magnetization specification: Vertical 1P magnetized
Non-magnetized

◎Others: Pole marking with paint is available.

Ribbon-shaped product

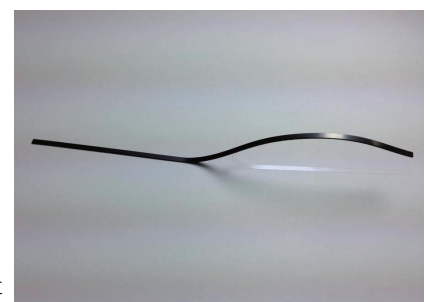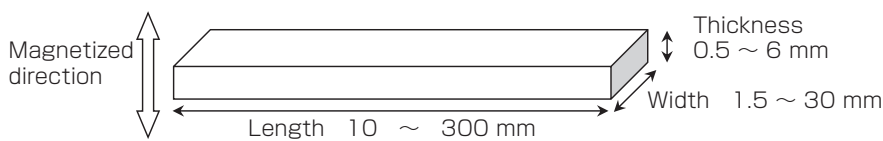

1.5mm width x 0.5mm thickness, with double-sided tape attached

◎Workable dimensions: length 10 - 300 mm / width 1.5 - 30 mm / thickness 0.5 - 6 mm

※There are limits according to the balance between each dimension.


◎Magnetization specification: Vertical 1P magnetized

One surface, multi-pole magnetization: 4mm or 7mm magnetization pitch
Non-magnetized

◎Others: Double-sided tape attachment is available.

Heat fusion of polypropylene (PP) protective film on the surface is available.

Hoop-shaped product

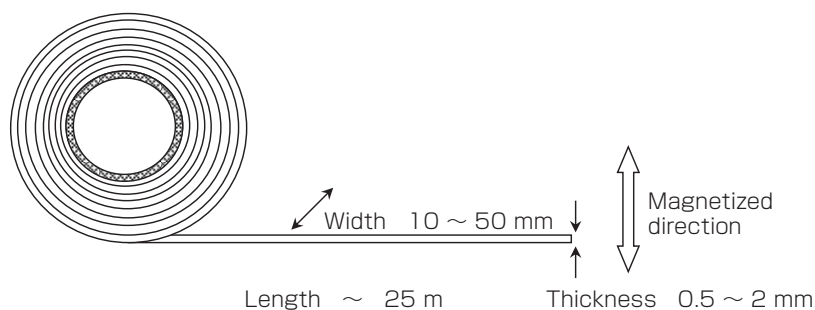

◎Workable dimensions: length up to 25 m / width 10 - 50 mm / thickness 0.5 - 2 mm

※Wound onto a corrugated cardboard tube

※There are limits according to the balance between length, width and thickness dimensions.


◎Magnetization specification: Vertical 1P magnetized

Non-magnetized

◎Others: Double-sided tape attachment is available.

Heat fusion of polyethyleneterephthalate (PET) protective film on the surface is available.

3. Adhesion and Other Uses

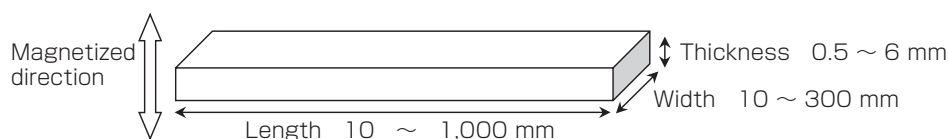

◎Workable dimensions: length 10 - 1,000mm / width 10 - 300mm / thickness 0.5 - 6mm

※There are limits according to the balance between length, width and thickness dimensions.

◎Magnetization specification: Vertical 1P magnetized

※Up to 250 mm width for lengths of 300 mm or less, and up to 50 mm width for lengths exceeding 300 mm are available.

One surface, multi-pole magnetization: 4 mm or 7 mm magnetization pitch

◎Others: Double-sided tape attachment is available.

Heat fusion of polyethyleneterephthalate (PET) protective film on the surface is available.